


ZAKRES WYMIAROWY / MEASUREMENTS / ABMESSUNGEN / РАЗМЕРНЫЙ РЯД:

H – wysokość / height / Höhe / высота, **B** – szerokość / width / Breite / ширина



DP-XLF, XCFF

H min. - max. = 283-1284

B min. - max. = 296-596

WYJĄTKI / EXCEPTIONS / AUSNAHMEN / ИСКЛЮЧЕНИЕ

H = 570, 713, 860, 920, 1000

B = 260

H min. - max. = 283-570

B = 296-1196



DR-XLF, XCFF

H min. - max. = 283-1102

B min. - max. = 296-596

WYJĄTKI / EXCEPTIONS / AUSNAHMEN / ИСКЛЮЧЕНИЕ

H min. - max. = 283-570

B = 296-1196



DPG-R240-XLF, XCFF

H = 570, 713, 860, 920, 1000

B = 522

promień wewnętrzny / inner radius /

Innenradius / внутренний радиус = 240




DRG-R240-XLF, XCFF

H = 570, 713, 860, 920, 1000

B = 522

promień wewnętrzny / inner radius /

Innenradius / внутренний радиус = 240



DK-XLF, XCFF

H min. - max. = 283-1000

B min. - max. = 296-596

WYJĄTKI / EXCEPTIONS / AUSNAHMEN / ИСКЛЮЧЕНИЕ

H min. - max. = 283-570

B = 296-1196




BLR-XKF (S-70)

PLYCINOWO-RAMOWA / FRAME-AND-PANEL / RAHMEN UND FÜLLENDE

PLATTE / РАМОВО-ФИЛЕНЧАТАЯ

H min. - max. = 350-1284

B min. - max. = 153-295




CZ-CF

Z FREZEM ZEW. / OUTER MOULDING / AUSSEN GEFRÄST /

С ФРЕЗЕРОВОЙ ПО КРАЮ

H min. - max. = 110-282, B min. - max. = 196-1196

opcja HxB = 140x146



CZR-XKF (S-70)

PLYCINOWO-RAMOWE / FRAME-AND-PANEL / РАМОВО-ФИЛЕНЧАТАЯ

PLATTE / РАМОВО-ФИЛЕНЧАТАЯ

H min. - max. = 153-282

B min. - max. = 296-1196



BL-AB

PLASKA / FLAT / PLATT / ПЛОСКАЯ

H min. - max. = 350-1284

B min. - max. = 30-295




BL-BŁ

Z FREZEM ZEW. / OUTER MOULDING / AUSSEN GEFRÄST /

С ФРЕЗЕРОВОЙ ПО КРАЮ

H min. - max. = 350-1284

B min. - max. = 50-295

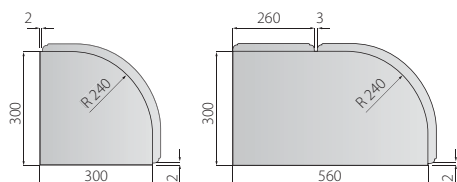

SPOSÓB MONTAŻU ELEMENTÓW GIĘTYCH
CURVED DOOR ASSEMBLY / ART UND WEISE DER MONTAGE DER
GEBOGENEN ELEMENTE / МОНТАЖ ГИУТЫХ ЭЛЕМЕНТОВ

PROPONOWANE WYBARWIENIA / COLOURS / FÄRBUNGEN / ЦВЕТА



11.17.03¹



11.18.02¹



03.00.01²



05.06.00²



11.08.00⁴



11.18.02⁴